

Qr Pro Baffle GU10

Downlights



Data Sheet

Product Information

The QR PRO GU10 downlights are the Ultimate solution for downlighting areas in domestic applications. With a vast array of attachments this solution allows you to build your fitting to suit your needs exactly as intended.

Complete with a 1 years warranty for your peace of mind.

Product Features






- 1 years warranty
- 4 Rim Options available: White, Black, Chrome and Satin Chrome
- Tilt and fixed recessed frame options
- Push to fit wire terminal blocks for ease of wiring for the end user
- The ultimate GU10 Downlight Solution



Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSRDL400	QR Pro Fixed Recessed Frame						
KSRDL401	QR Pro Tilt Recessed Frame						
KSRDL402	QR Pro GU10 Lamp Holder & Push Fit Terminal						

Rim Options

	KSRDL425	QR Pro White Rim with White Baffle
	KSRDL426	QR Pro White Rim with Black Baffle
	KSRDL427	QR Pro White Rim with Chrome Baffle
	KSRDL428	QR Pro White Rim with Matt Gold Baffle
	KSRDL429	QR Pro White Rim with Rose Gold Baffle
	KSRDL430	QR Pro Black Rim with Black Baffle
	KSRDL431	QR Pro Black Rim with Chrome Baffle
	KSRDL432	QR Pro Black Rim with Matt Gold Baffle
	KSRDL433	QR Pro Black Rim with Rose Gold Baffle
	KSRDL434	QR Pro Chrome Rim with Black Baffle
	KSRDL435	QR Pro Satin Chrome Rim with Black Baffle

Nominal voltage	220~240VAC
Operating frequency	50/60Hz
Ambient temperature range	0°C~+40°C
Beam angle	15-25°
IP rating	20


Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests


In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU


Product Dimensions




KSRDL400




KSRDL401



KSRDL402



KSRFRD411-14

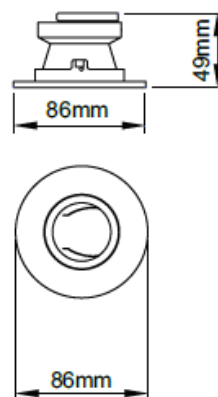

KSRDL430-435

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.