

# Navara Cr



## Product Information

The Navara Cr IP65 battens are suitable for a multitude of Domestic applications.

They come complete with a 3 year warranty for your peace of mind.

## Product Features

- 3 year warranty
- Class II
- IP65
- High efficiency LED technology up to 115 lumens per watt
- 4000K LED
- CRI: Ra80
- Instant on
- Push Fit terminal Block
- 3 sizes and outputs to choose from
- Can be suspended
- L70 - 50,000Hrs

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR9835	Navara Cr 2ft 15w 4000K LED IP65 Batten	15	4000	1725	80	D	II
KSR9836	Navara Cr 4ft 22w 4000K LED IP65 Batten	22	4000	2530	80	D	II
KSR9837	Navara Cr 5ft 25w 4000K LED IP65 Batten	25	4000	2875	80	D	II

Nominal voltage	200~240VAC
Operating frequency	50-60Hz
PFC	0.9
Start Time	< 0.5 Sec
Ambient temperature range	-20°C to +40°C
IP rating	65

## Construction

Body:	Polycarbonate
Diffuser:	Polycarbonate
Brackets:	Stainless Steel

## Standards


BSEN60598-1:2021      Luminaires – Part 1: General requirements and tests

## In Conformity with


LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/2020/EU
RoHS	Restriction of hazardous substances 2015/863/EU

# Product Dimensions


## KSR9835

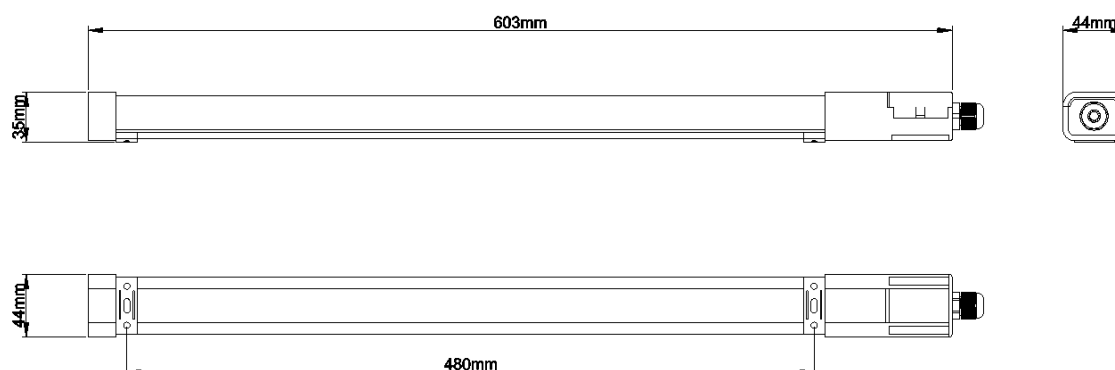

## KSR9836

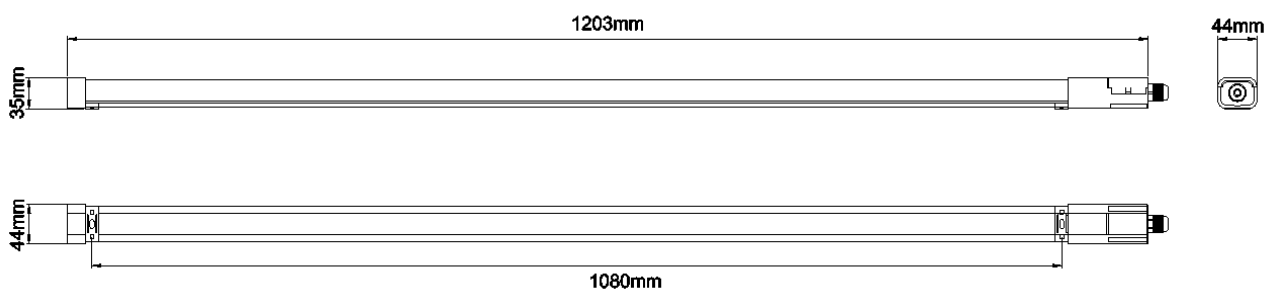

## KSR9837

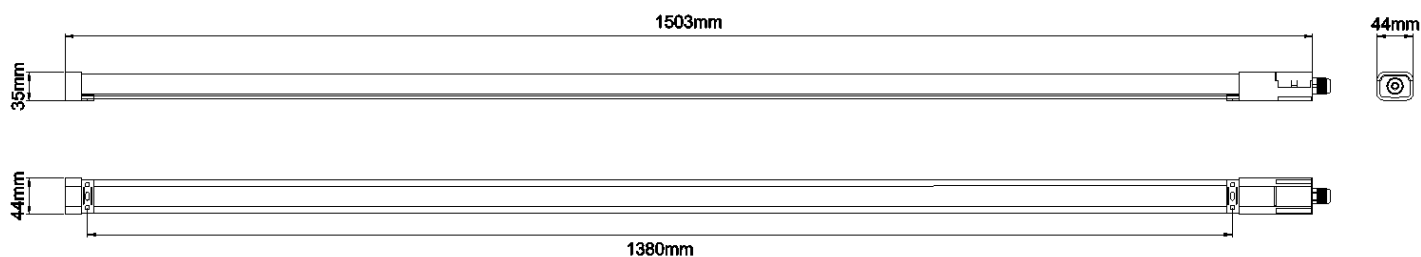

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.