Installation Sheet)

) KSR7290

Read these instructions before commencing installation & retain them for future reference.

IP20⊕ **(**€ 240V 9W

Important Information

It is recommended that luminaires are installed by a qualified electrician The installation of this product must comply with the current edition of the IEE wiring regulations BS7671.

These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before installation or servicing. This fitting is Non Dimmable

Installation Details

Secure your chosen shade to this base section using the two fixing screws provided.

Remove the retaining grub screws from the top of the wall light holding the back plate to the fitting.

Secure the back plate to a suitable surface, dressing supply cable to ensure it is not snagged on any part of the bracket.

Connect the mains supply to the terminal block following the marking on

the base and/or the guide in Fig 1 as below.


Place the fitting back on to the base plate and secure with the grub screw.

Turn on the power and test.

Optional Shades:

KSR7191 Phily Shade, White or Brushed Aluminium (Sold Separately) KSR7292 Brook Shade, White or Brushed Aluminium (Sold Separately)

Fig. 1



Lamp Details


Light Source: LED Module Wattage: 9W, 650 Lumens 3000k Warm White Lamp Included


Phily/Brook Base




) Wall Light

LED Wall Light, White Finish

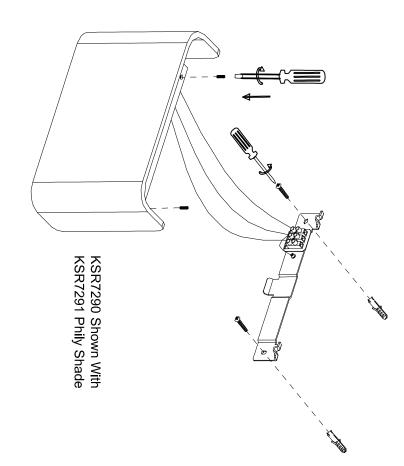





KSR Lighting Aftersales: 023 92 674343 E-mail: info@ksr-lighting.co.uk