

Available finishes: Black

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP44 240V~50Hz 7W

These fittings are Class II and are not required to be Earthed

**Important Information**



It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

**Important User Advice**

Always switch off mains supply before installing/servicing. Do not use Megger or similar high voltage instruments. Due to the fact this product contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners). At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation


**Installation Procedure**

Remove and retain the diffuser by carefully releasing the 4 tabs (2 each side). Remove the single screw and retain to the cable cover. Fix the plastic back plate to wall using suitable fixings for the substrate. Connect the supply to the terminal block: Brown (Live) and Blue (Neutral) as per Fig.1. Refit the cable cover and fix with screw.. Attach the diffuser back on to the bulkhead. Switch on supply and test.

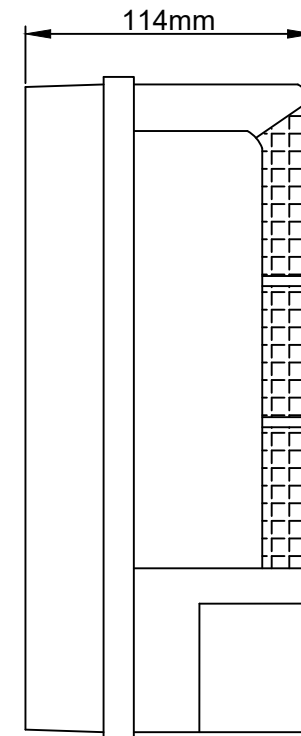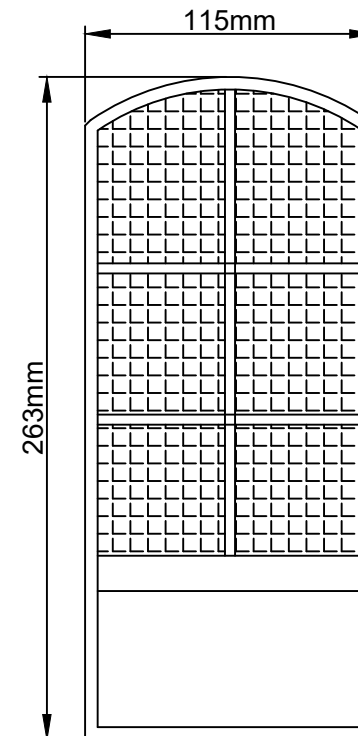

**KSR1155**

**Fig. 1**

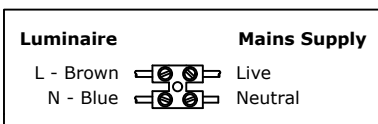

*This product contains a light source of energy efficiency class F  
The LED light source and Control Gear in this product can be replaced by a professional.*

**Lamp Details**

Light Source: Dedicated LED  
Wattage: 7W  
Lumen Output: 600 Lumens  
CRI: 85  
Colour: 4000K



KSR Lighting Aftersales: 023 92 674343  
E-mail: aftersales@ksrlighting.com