

Cabello Kit



Product Information

Exterior Recessed Lighting

The Cabello decking light kit is ideal for placing the 10 heads in decking to show steps or lighting the perimeter. Supplied as a complete kit with all connectors and driver.

Comes with a 2 year warranty for your peace of mind.

Product Features

- 2 year warranty
- Class II
- IP67
- Instant on
- 10x 0.5W heads
- 3000K or 6000K LED
- Kit complete with driver



www.ksrlighting.com

Product Specification

Product Code	Product Description	Wattage (W)	ССТ (К)	Energy Efficiency Class	Protection Class
KSR1333WW	Cabello 10x 0.5W LED 10 Light Kit Stainless Steel	10x 0.5W	3000	А	П
KSR1333CW	Cabello 10x 0.5W LED 10 Light Kit Stainless Steel	10x 0.5W	6000	А	II

Nominal voltage	220~240VAC	
Operating frequency	50-60Hz	
Circuit Power	6.53w including driver losses	
Circuit Current	0.03A	
Driver mA Rating	350mA	
PFC	0.84	
In Rush Current	0.407A Max Peak	
Ambient temperature range	-20°c~+40°c	
Start time	< 0.5 sec	
IP rating	67	

Construction

Body:	Plastic
Rim:	304 Stainless Steel

Standards


BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU

Product Dimensions

@ 25mm

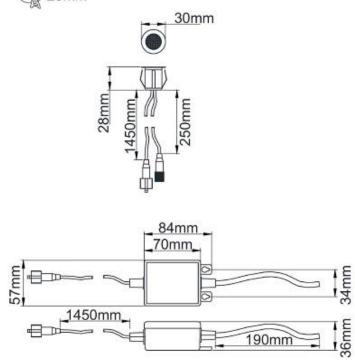

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

www.ksrlighting.com