Installation Sheet) KSR1319

Read these instructions before commencing installation & retain them for future reference.

IP65 ⊕ **(** € ()0.5m | 240 V 35 W

These fittings are Class I and must be Earthed

Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before servicing, fitting or replacing lamps. Always check the lamp is correct for the application, including its voltage and wattage. Ensure the lamp is correctly located in the lampholder.

General Maintenance

General maintenance and cleaning should be performed at least quarterly. Clean product outer using a damp cloth, dried and buffed to a shine. After any maintenance or lamp replacement, remember to check all seals are intact. Also available is a Stainless Steel cleaning kit to remove airborne contaminates (KSR3183).

Installation Procedure


Ensure mains supply is turned off. Connect to the mains supply using a suitable waterproof connector. Please note the pre-wired cable is not suitable for burying in the ground. Unscrew the lamp cap (anti-clockwise) fit lamp (maximum 35W) if using GU10 LED lamps please check with the manufacturer that they are suitable for use in enclosed luminaires. Re-fit lamp cap ensuring that the seal is in place. Turn on mains supply and test luminaire.







GU10 Stainless Steel Spike Spotlight

Available finish: - Stainless Steel



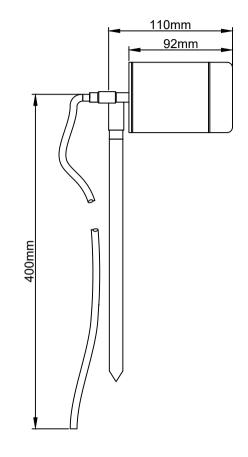





KSR Lighting Aftersales: 023 92 674343 E-mail: aftersales@ksrlighting.com