

Read these instructions before commencing installation & retain them for future reference.

IP65 0.3m 240V 18W

Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before servicing.

Installation Procedure (Fig. 1)

Isolate supply before installation.

Remove and retain the four hex bolts holding the rim remove the rim & diffuser.

Remove the three screws holding the LED gear tray.

Pass the supply cable through the grommet or CTS gland.

Ensure the fixing surface is flat and even.

Fix the base to the wall or ceiling, use adequate fixings with regard to type of surface.

Ensure incoming cables are protected.

Remove and retain the four screws from the terminal housing.


For non-emergency luminaires terminate wiring as per Fig.2.

For emergency luminaires terminate wiring as per Fig.3.


Make sure the seal is in place and undamaged.

Re-install the diffuser and rim tighten using the retained hex bolts.

Turn on the mains supply and test luminaire.

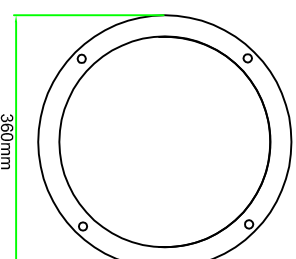


KSRSSF270-2

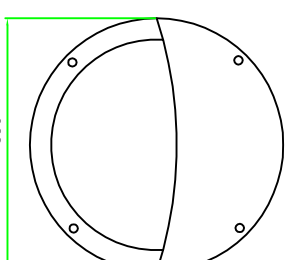

KSRSSF273-5



Fig.1



Ceiling mounted



Wall mounted

Fig.2


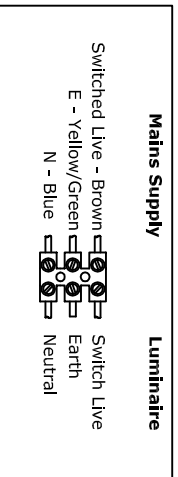


Fig.3



Lamp Details

Lamp: LED
 Wattage: 18W
 Colour: 4000K
 KSRSSF270-272 Lumen Output: 1100 lumens
 KSRSSF273-275 Lumen Output: 670 lumens
 CRI: Ra86

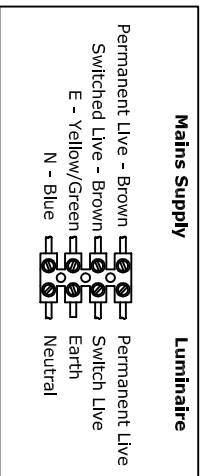