

Ogive Wall light

Recessed Wall Lighting



Data Sheet


Product Information

The Ogive recessed Spotlights are perfect for accent lighting and give a contemporary look to any stairs.

These fittings are ideally suited for residential applications and domestic applications.

Product Features

- 2 year warranty
- Complete with Driver
- Class II
- 3000K as standard
- Life expectancy of up to 30,000hrs
- CRI: Ra80

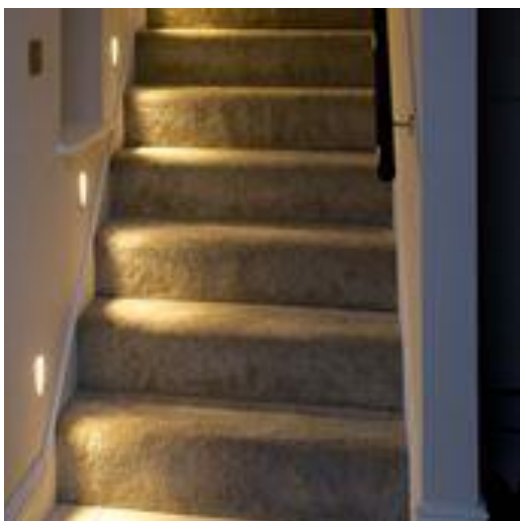

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	Protection Class
KSR7259	Ogive 1w LED Recessed Wall Light	1w	3000	61	II

Nominal voltage	220~240VAC
Operating frequency	50/60Hz
Circuit Wattage	1w LED
Circuit Current	0.03A
Driver Current Rating	350mA
PFC	0.35
In Rush Current	0.08 Max Peak
Ambient temperature range	-10°C to +30°C
IP rating	20

Construction

Body: Aluminium


Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2009/125/EC
RoHS Restriction of hazardous substances 2011/65/EU

Product Dimensions

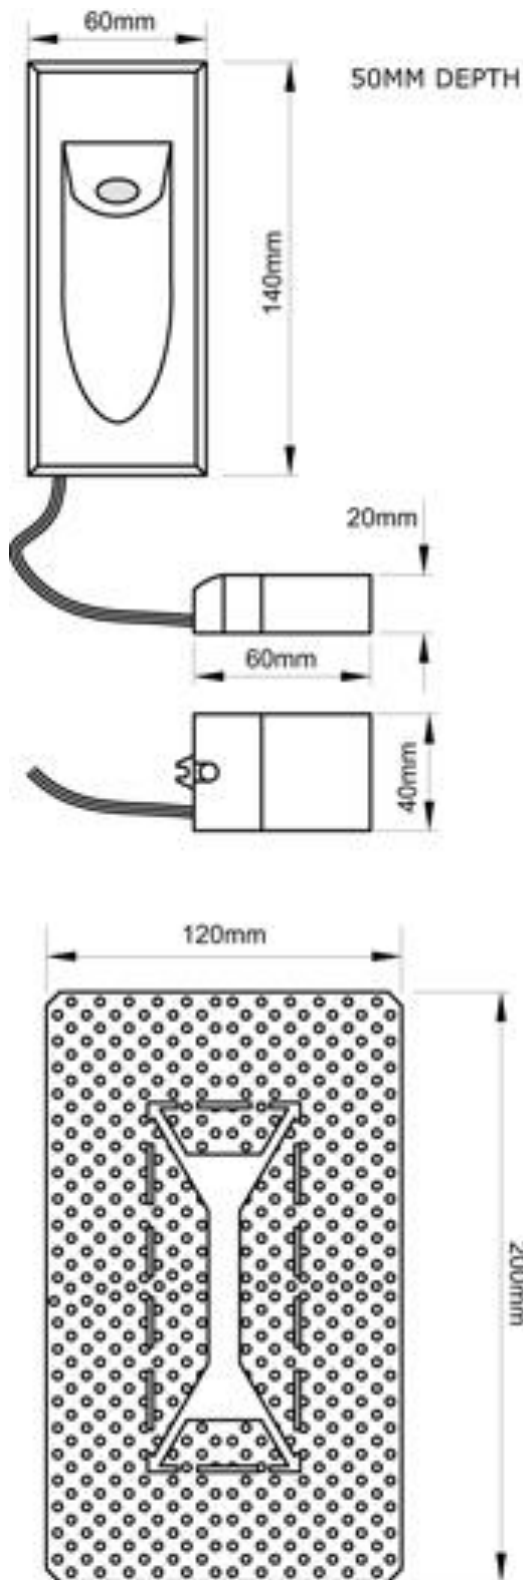

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

www.ksrlighting.com