

Tilo LED

Exterior Wall Lighting



Data Sheet

Product Information

The Tilo LED wall light is perfect for down lighting and wall washing external walls.

Comes with a 2 year warranty for your peace of mind.

Product Features

- 2 year warranty
- Class I
- IP55
- Instant on
- 3000K LED
- 336 Lumens Delivered
- CRI: Ra82
- Life expectancy up to 30,000 hours
- Non dimmable Integrated driver



Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR7164	Tilo 6W Anthracite LED Wall Light	6	3000	336	82	A	I

Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Circuit Power	6.04w including driver losses
Circuit Current	0.026A
PFC	0.99
Ambient temperature range	-20°c~+40°c
Start time	< 0.5 sec
IP rating	55

Construction

Body: Cast Aluminium
Lens: Glass


Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2009/125/EC
RoHS Restriction of hazardous substances 2011/65/EU

Product Dimensions

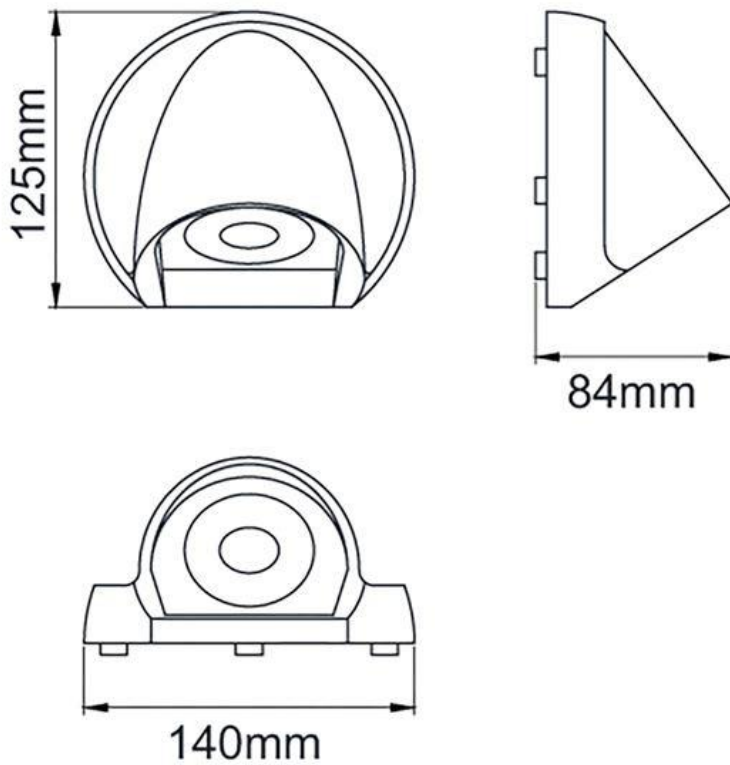

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

