### Installation Sheet

## KSR1150BLK

Read these instructions before commencing installation & retain them for future reference.

# IP44 □ **C€** 240V 40W Max.

#### **Important Information**

It is recommended that these lanterns are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.

These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

#### Important User Advice


Always switch off mains supply before servicing, fitting or replacing lamps. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners) and greasing all nut/bolts every 3 months.


#### Installation Procedure

- a) Fix plastic plate to wall using suitable fixings.
- b) Connect supply leads with terminal block: Brown (L), Blue (N).
- c) Insert the terminal block on the plastic back plate.
- d) Attach lantern to plastic plate.
- e) Fit suitable lamp not exceeding wattage specified on the lanterns label.
- f) Switch on supply and test.



Available Finishes: Black

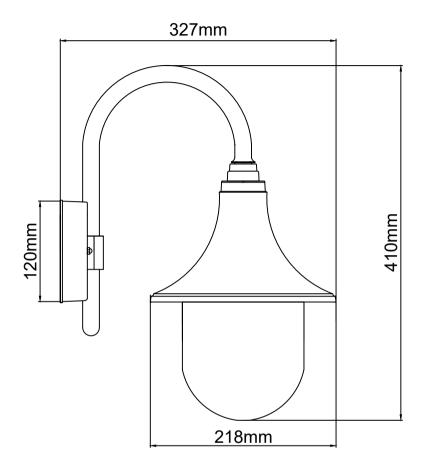



KSR Lighting Aftersales: 023 92 674343 E-mail: aftersales@ksrlighting.com



19-01-19MAC