



Finishes: Black/Opal or White/Opal

Read these instructions before commencing installation & retain them for future reference.

IP65 □ CE □ 0.3m 240V 15W IK10

Important Information




It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before fitting or servicing.

Installation Procedure

- Isolate mains supply before installation.
- Unclip and remove the front cover to expose the 4 diffuser screws.
- Unscrew the four diffuser screws and remove the diffuser.
- Using one of the 2 side cable entry points. Create a 20mm hole and fit the supplied cable gland. Pass intended supply wires through the cable gland and tighten.
- Ensure the fixing surface is flat and even.
- Fix base to the wall using adequate fixings with regards to the type of surface.
- Terminate wiring as per the diagram below.
- Select the colour required using the switch located just below the terminal block.
- Note: Never change the LED colour with the luminaire powered on as this can damage the luminaire.
- Make sure the base seal is in place and undamaged.
- Replace the diffuser secure using the the four screws.
- Clip the front cover over the fitting.
- Turn on the mains supply and test luminaire.

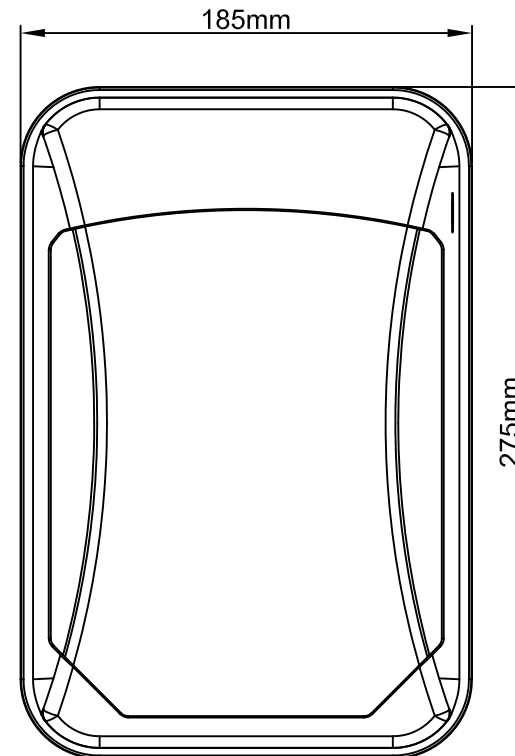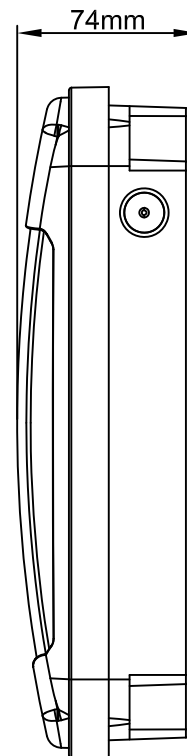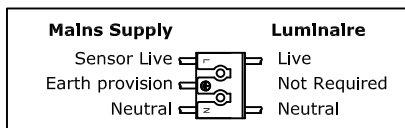

KSR1174

Lamp Details

Lamp: LED
 Wattage: 15W
 Colour: 3000K, 4000K and 6000K CCT
 Lumen Output:
 3000K - 1013 lumens
 4000K - 1143 lumens
 6000K - 1043 lumens
 CRI: Ra>83
 Photocell Lux: On <30 lux - Off >70 lux



KSR Lighting Aftersales: 023 92 674343
 E-mail: aftersales@ksrlighting.com