

# Coriano Multi Wattage 3CCT LED Bollard

*Bollards / Commercial*



Data Sheet

## Product Information

The Coriano Multi Wattage 3CCT LED Bollard is available in 2 heights and is ideal for a multitude of exterior applications. Designed to be used in both domestic and commercial applications & with the option to be able to adjust the wattage & colour to suit the application at the flick of a switch. These are ideal for pathways, car parks, security lighting and entrance lighting amongst other applications. Also available as a Photocell or Emergency options.

Complete with a 5-year warranty

## Product Features

- 5-year warranty
- Class I
- IP65
- IK10
- Up to 2055 Lumens
- High CRI up to Ra88
- Instant on
- Multi Wattage 12W or 20W
- 3 switchable Colour temperatures 3000K/4000K/6000K
- Non-Dimmable
- Available in 2 heights 750mm and 1000mm
- 135° beam angle
- Supplied with Concrete fixing kit
- L70-25,000hrs

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR9996	Coriano 750mm Multi Wattage 3CCT LED Bollard	12	3000	1160	84	F	I
			4000	1245	88	E	
			6000	1235	85	E	
		20	3000	1885	84	F	I
			4000	2055	88	E	
			6000	1955	85	F	
KSR9997	Coriano 1000mm Multi Wattage 3CCT LED Bollard	12	3000	1160	84	F	I
			4000	1245	88	E	
			6000	1235	85	E	
		20	3000	1885	84	F	I
			4000	2055	88	E	
			6000	1955	85	F	

## For the Photocell & Emergency variations please use the below ordering codes

KSR9996/PH – Coriano 750mm Multi Wattage 3CCT LED Bollard c/w Photocell

KSR9996/EM - Coriano 750mm Multi Wattage 3CCT LED Emergency Bollard

KSR9997/PH – Coriano 1000mm Multi Wattage 3CCT LED Bollard c/w Photocell

KSR9997/EM - Coriano 1000mm Multi Wattage 3CCT LED Emergency Bollard

<b>Nominal voltage</b>	220~240VAC
<b>Operating frequency</b>	50-60Hz
<b>Circuit Wattage</b>	tba
<b>Circuit Current</b>	0.25A Max
<b>Driver Current Rating</b>	260mA
<b>PFC</b>	0.7
<b>In Rush Current</b>	tba
<b>Start Time</b>	< 0.5 Sec
<b>Ambient temperature range</b>	0°C to +35°C
<b>IP rating</b>	65

## Construction

Body: Die Cast Aluminium  
 Lens: Polycarbonate


## Standards

BSEN60598-1:2021      Luminaires – Part 1: General Requirements and tests

## In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/2020/EU
RoHS	Restriction of hazardous substances 2015/863/EU

## Product Dimensions

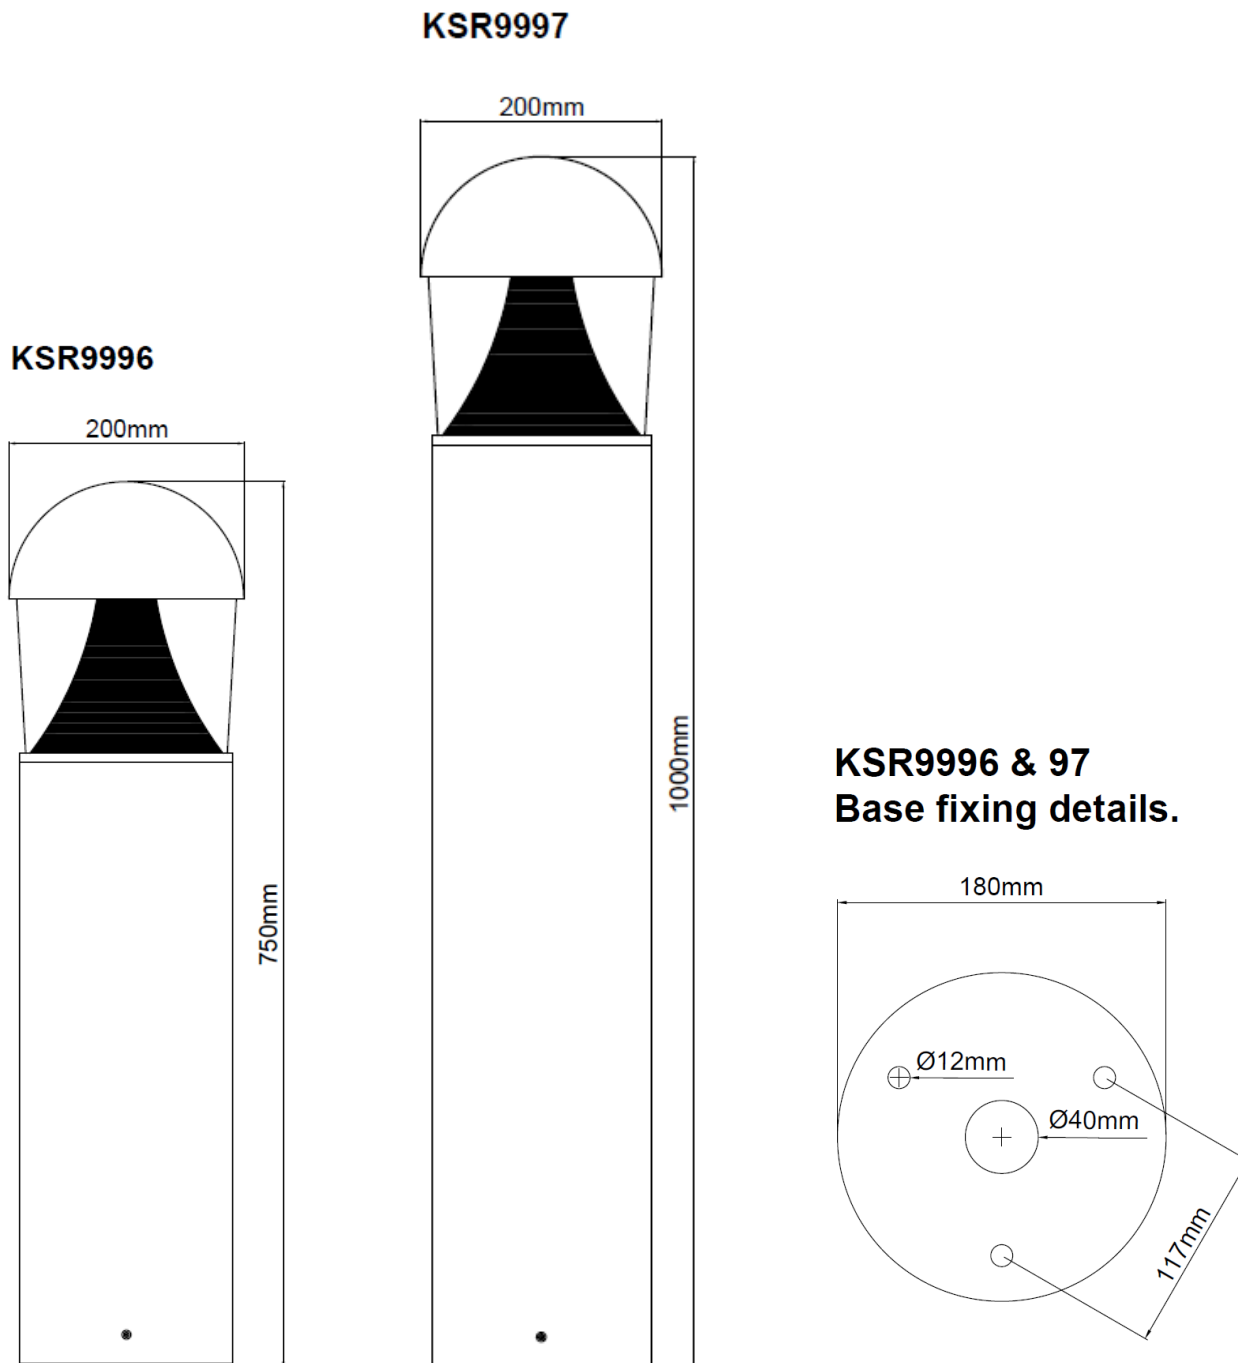

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.