



Lalinea Range

Commercial Lighting



Data Sheet

Product Information


The Lalinea pendant lighting is a perfect for the office environment. With optional accessories to create a wide range of lighting layouts including 'L', 'T', 'X' connectors and a plug & play kit that provides indirect lighting. Supplied with a joiner to connect 2 luminaires together and a 2-part suspension kit in the box. Also suitable for direct ceiling mounting if required.

Complete with a 5-year warranty

Product Features

- 5-year warranty
- Class I
- IP20
- CRI Ra>80
- Instant on
- 3 switchable Colour temperatures 3000K/4000K/6000K
- Surface or Suspended (suspension kit supplied with each fitting)
- Dimmable Options Available upon request
- Emergency Option available
- Plug & Play accessories
- Wide 110° beam angle

KSR98259



KSR98262



KSR98263



Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR98250	Lalinea X4 20W/32W 3CCT LED 4ft Office Pendant Light Black	20	3000	2285	>80	G	I
			4000	2395			
			6000	2290			
		32	3000	3870	>80	G	I
			4000	4005			
			6000	3895			
KSR98251	Lalinea X4 20W/32W 3CCT LED 4ft Office Pendant Light White	20	3000	2285	>80	G	I
			4000	2395			
			6000	2290			
		32	3000	3870	>80	G	I
			4000	4005			
			6000	3895			
KSR98252	Lalinea X4 3CCT LED 4ft Back Lit Kit Black Black	2.5	3000	300	>80	E	III
			4000	300			
			6000	300			
KSR98253	Lalinea X4 3CCT LED 4ft Back Lit Kit Black White	2.5	3000	300	>80	E	III
			4000	300			
			6000	300			
KSR98254	Lalinea X5 25W/42W 3CCT LED 5ft Office Pendant Light Black	25	3000	2965	>80	G	I
			4000	3130			
			6000	3015			
		42	3000	4910	>80	G	I
			4000	5020			
			6000	4925			
KSR98255	Lalinea X5 25W/42W 3CCT LED 5ft Office Pendant Light White	25	3000	2965	>80	G	I
			4000	3130			
			6000	3015			
		42	3000	4910	>80	G	I
			4000	5020			
			6000	4925			
KSR98256	Lalinea X5 3CCT LED 5ft Back Lit Kit Black Black	3	3000	350	>80	E	III
			4000	350			
			6000	350			
KSR98257	Lalinea X5 3CCT LED 5ft Back Lit Kit Black White	3	3000	350	>80	E	III
			4000	350			
			6000	350			
KSR98259	Lalinea L Connector Black	2	3-6000	240	>80	E	III
KSR98260	Lalinea L Connector White	2	3-6000	240	>80	E	III
KSR98261	Lalinea T Connector Black	2	3-6000	240	>80	E	III
KSR98262	Lalinea T Connector White	2	3-6000	240	>80	E	III
KSR98263	Lalinea X Connector Black	2	3-6000	240	>80	E	III
KSR98264	Lalinea X Connector White	2	3-6000	240	>80	E	III

Construction

Body: Aluminium
Lens: Polycarbonate

Standards


BSEN60598-1:2021
BSEN60598-2-22:2014+A1 2020





Luminaires – Part 1: General Requirements and tests
Luminaires – Part 2: Luminaires for Emergency Lighting

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

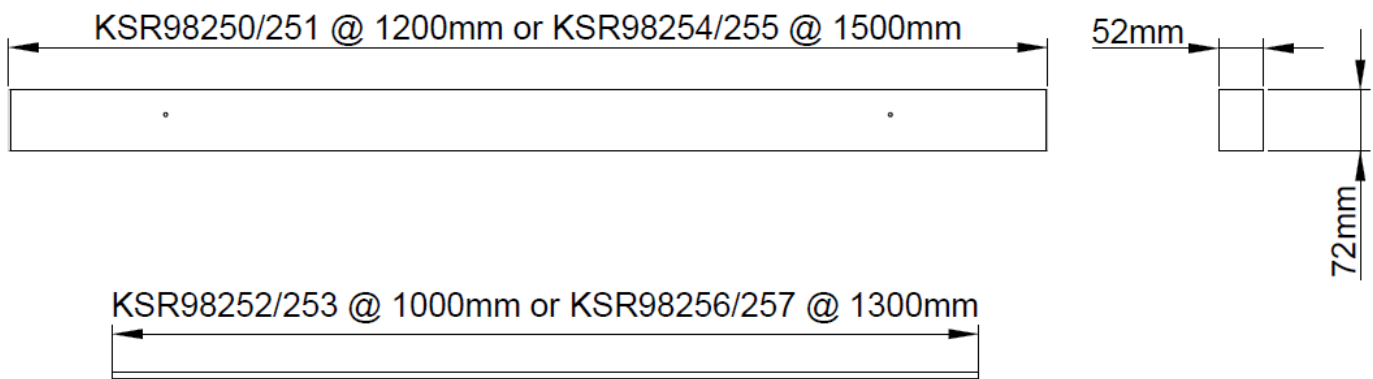

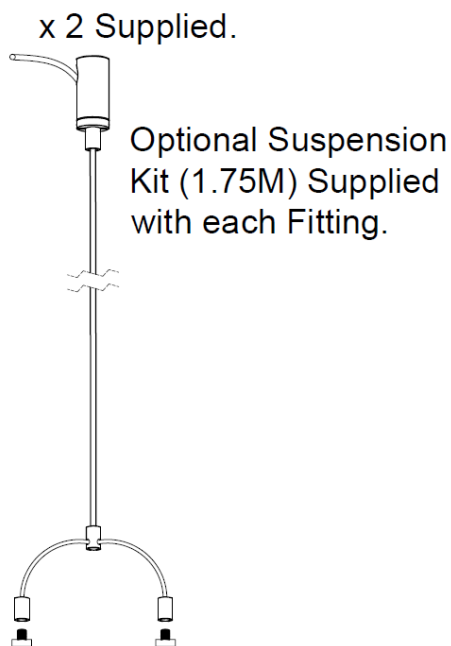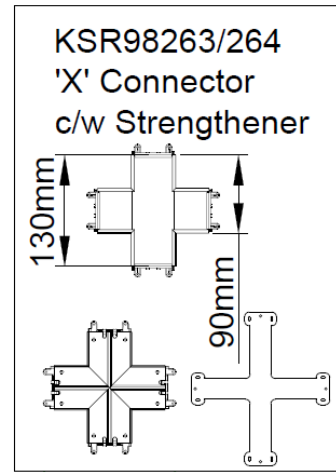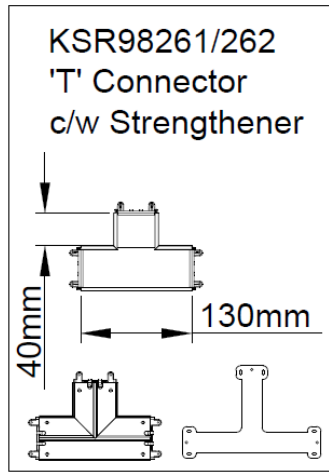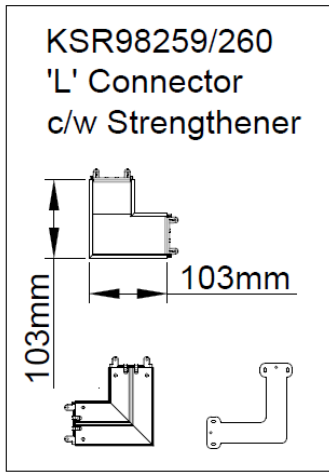

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.