

24V Constant Voltage Drivers

Accessories



Data Sheet

Product Information

Our **24V Constant Voltage** LED driver range is available in **12 variations** in numerous wattages ranging **from 4W up to 320W** & covering **IP20, IP65 & IP67**

These are suitable for products that require a 24V Constant Voltage such as our **Navara LED tape** or **Mimis Mini Range**.

With **dimnable and non-dimnable** versions available this range covers a broad range of varying applications.

Product Features

- 3 year warranty
- 24V Constant Voltage
- IP20 / IP65 / IP67
- Class I or II
- Versions Ranging from 4W up to 320W
- Polycarbonate Driver for IP20*
- Polycarbonate Potted Driver for IP65 & IP67 versions & Die cast Aluminium Potted Driver for IP67** versions
- Mains Dimmable versions support leading and trailing edge dimming

KSRDL274



KSRDL276



Product Specification

Product Code	Product Description	Max load	Current rating	Voltage Range	Types of Dimming	IP Rating	Protection Class
KSRDL272	12W 24V Constant Voltage IP65 LED Driver	12W	0.5A	24V	Non-Dimmable	IP65	II
KSRDL273	40W 24V Constant Voltage IP65 LED Driver	40W	1.67A	24V	Non-Dimmable	IP67	II
KSRDL274	4W 24V Constant Voltage IP65 LED Driver	4W	0.17A	24V	Non-Dimmable	IP65	II
KSRDL276**	240W 24V Constant Voltage LED Driver	240W	10A	24V	Non-Dimmable	IP67	I
KSRDL277**	320W 24V Constant Voltage LED Driver	320W	13.34A	24V	Non-Dimmable	IP67	I
KSRDL288	60W 24V Constant Voltage Driver	60W	2.5A	24V	Non-Dimmable	IP67	II
KSRDL289	100W 24V Constant Voltage Driver	100W	4.17A	24V	Non-Dimmable	IP67	II
KSRDL292*	25W 24V Dimmable Constant Voltage Driver	25W	1.04A Max	24V	Leading and Trailing edge	IP20	II
KSRDL293*	50W 24V Dimmable Constant Voltage Driver	50W	2.08A Max	24V	Leading and Trailing edge	IP20	II
KSRDL294*	100W 24V Dimmable Constant Voltage Driver	100W	4.2A Max	24V	Leading and Trailing edge	IP20	II
KSRDL295**	100W 24V Dimmable Constant Voltage Driver	100W	4.2A Max	24V	Leading and Trailing edge	IP67	I
KSRDL296**	200W 24V Dimmable Constant Voltage Driver	200W	8.3A Max	24V	Leading and Trailing edge	IP67	I

Nominal voltage	220-240VAC
Operating frequency	50/60Hz
Ambient temperature range	0°C~+35°C

Construction

www.ksrlighting.com

KSRDL272-287-294

Body: Polycarbonate


KSRDL276-277 & 295-

296 Aluminium


Body:

Product Dimensions


KSRDL272

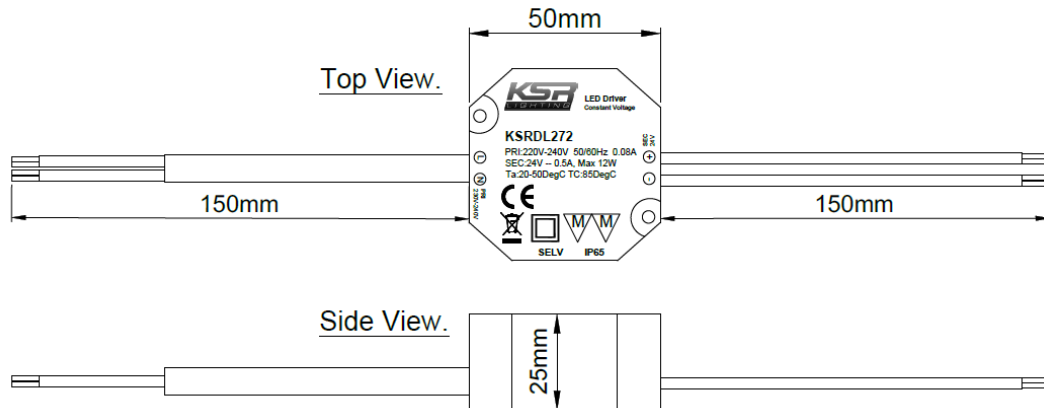


KSRDL273

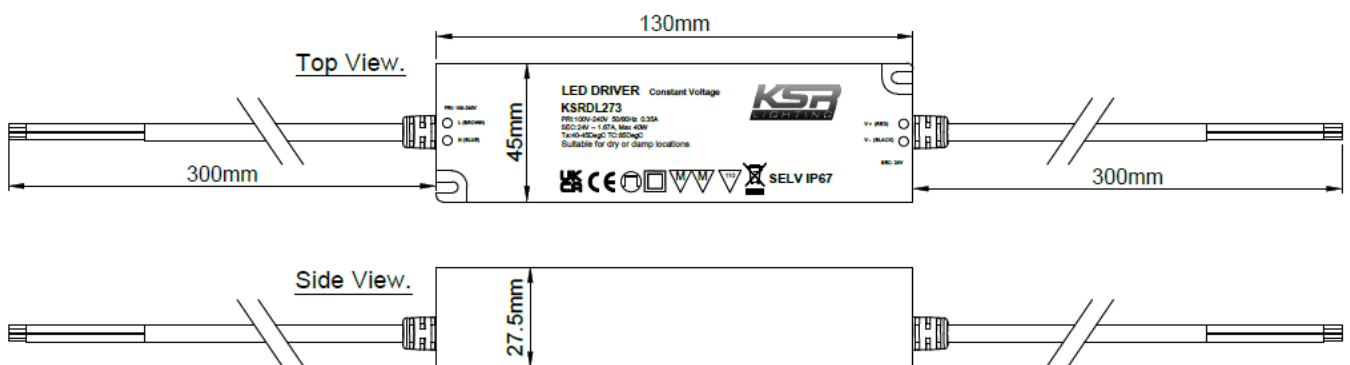


KSRDL274 - Top View

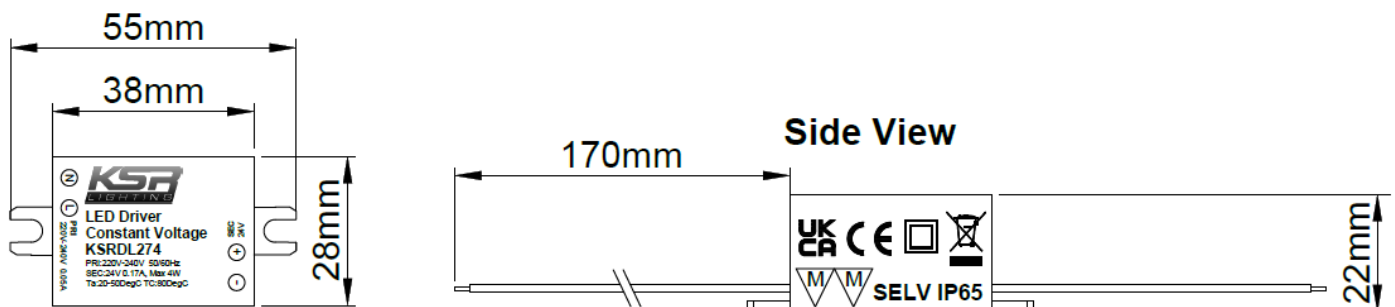


KSRDL276 - Top View

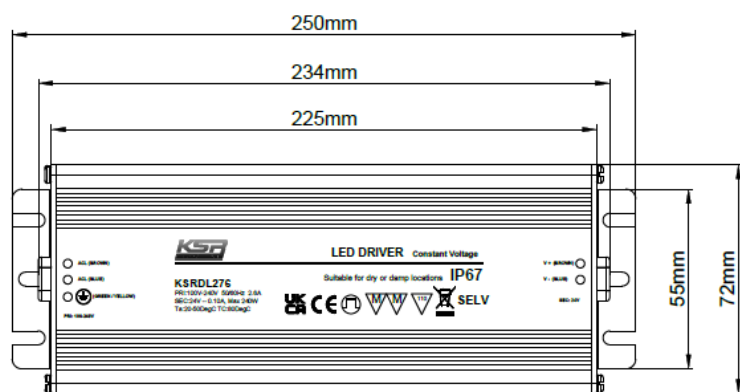


Side View

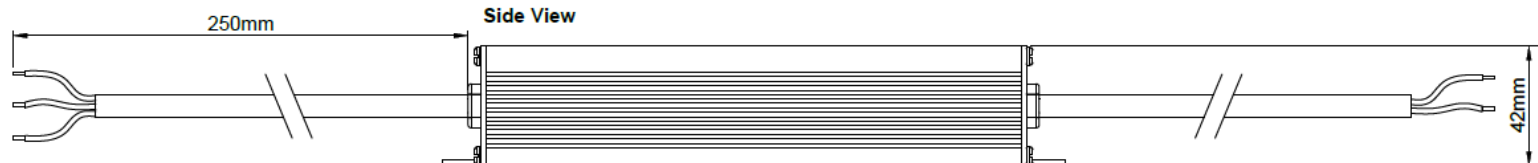


KSRDL277 - Top View

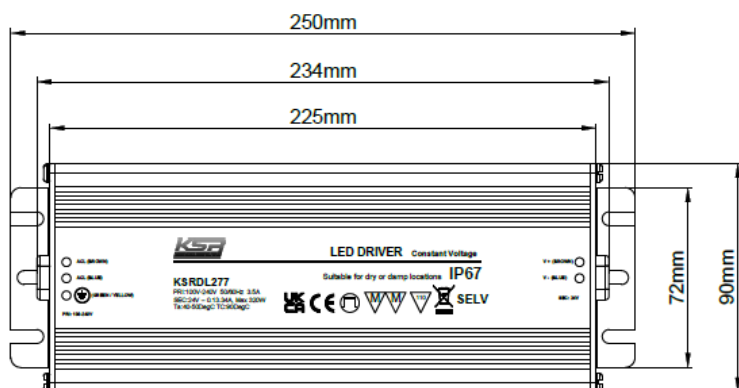


Side View

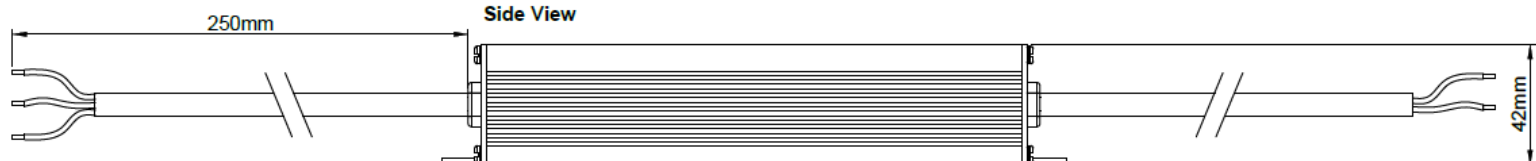


KSRDL292

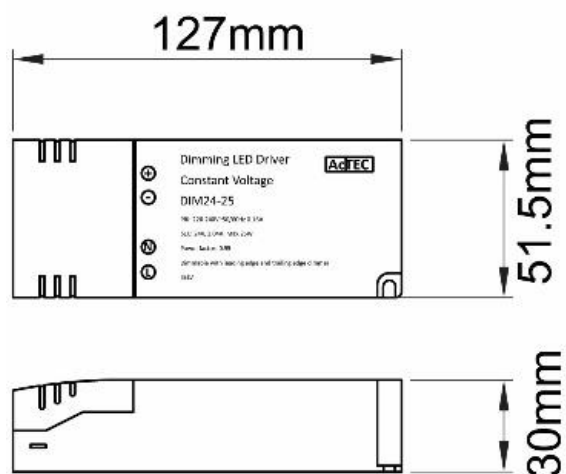

KSRDL293

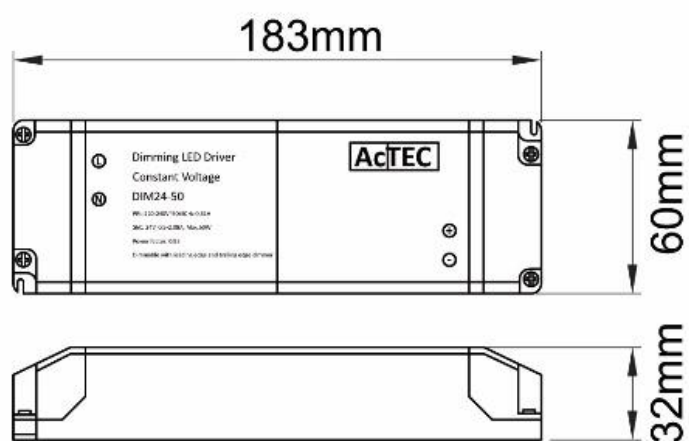


KSRDL294

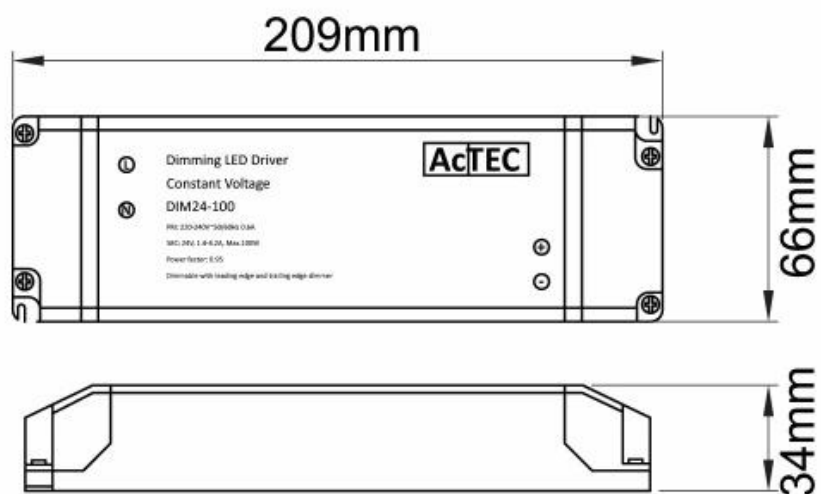


Product Dimensions Continued


KSRDL288

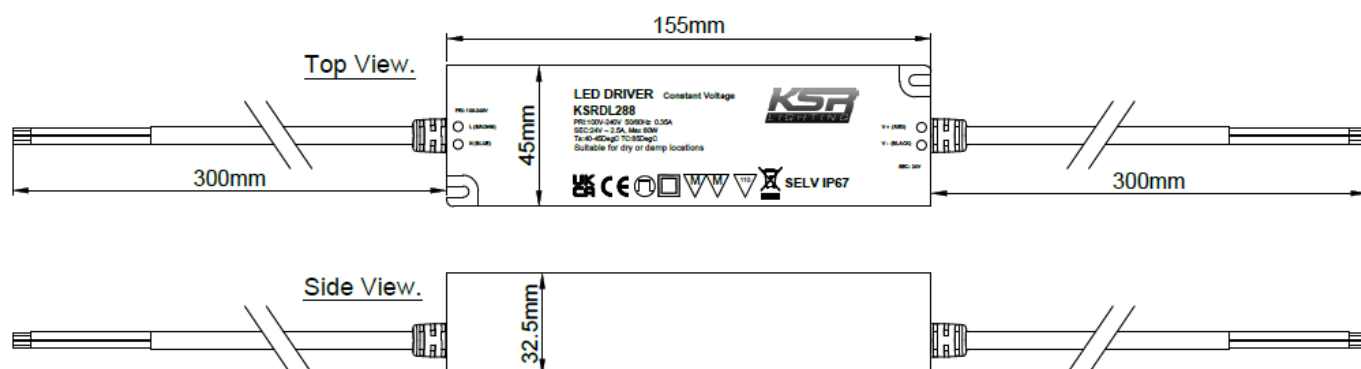


KSRDL289

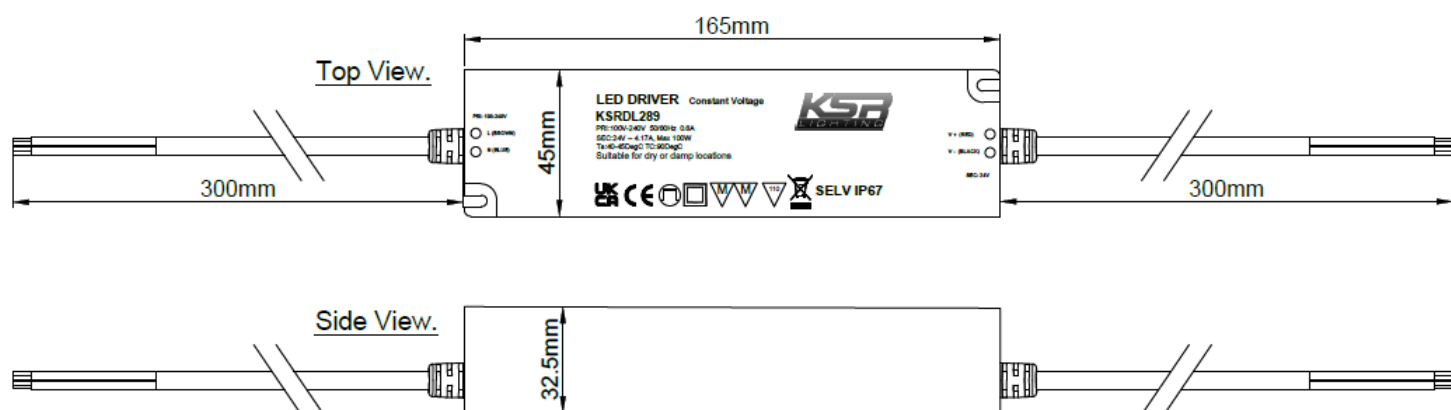

KSRDL295

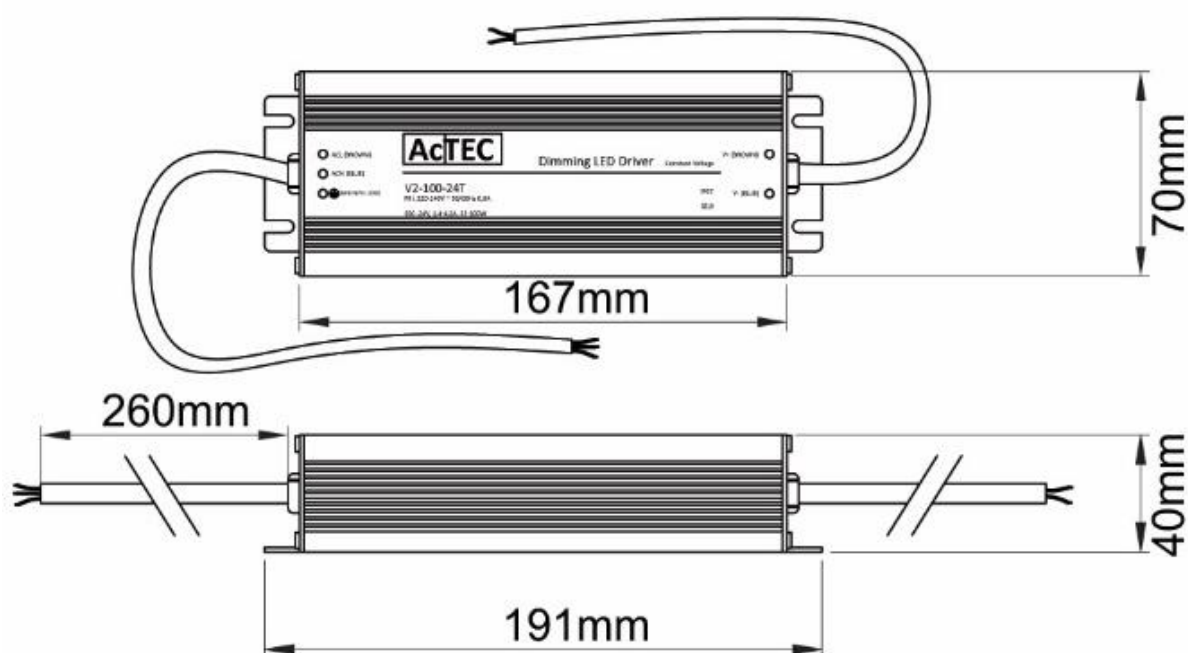

KSRDL296

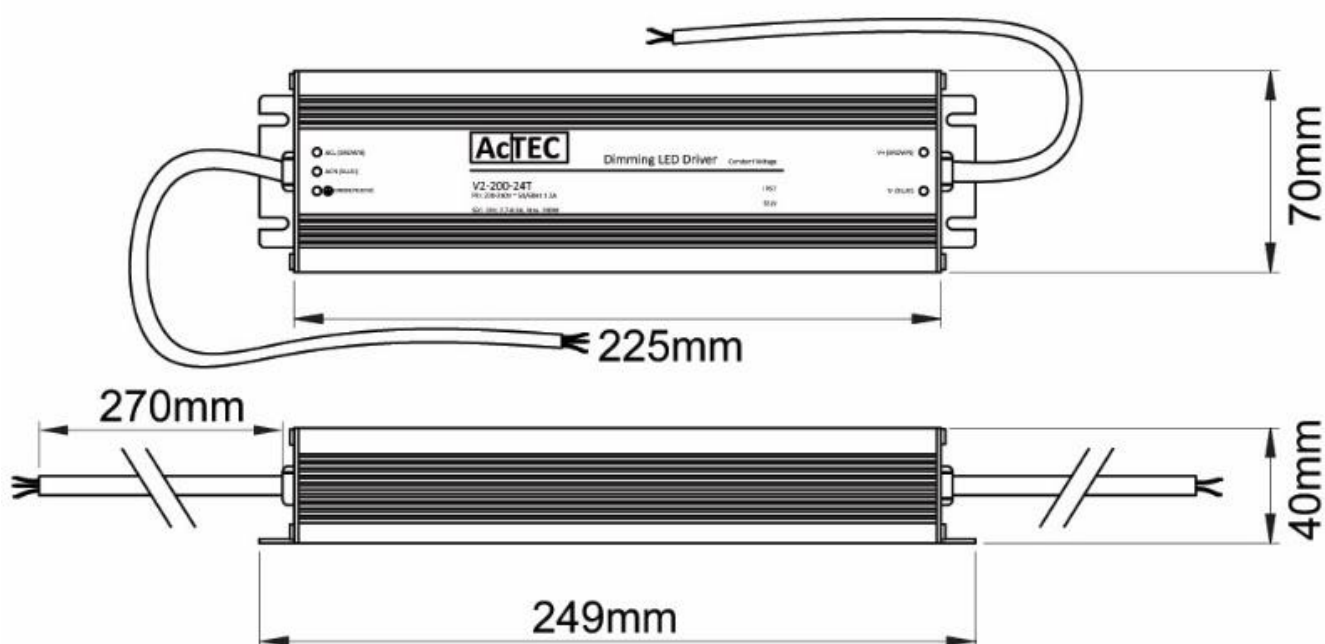

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.