



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP44    240VAC~50Hz 40W Max.

These fittings are Class II and do not require an Earth connection

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -20 ~ +40°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.

KSR recommend greasing all threaded parts and cleaning the body every 3 months minimum.


At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.


- Fix Plastic plate to wall using suitable fixings
- Connect supply leads with terminal block: Brown (L), Blue (N)
- Insert the terminal block on the plastic back plate
- Attach lantern to plastic plate
- Fit suitable lamp not exceeding wattage specified on the lanterns label (40W)
- Switch on supply and test luminaire

Available Finishes: Black

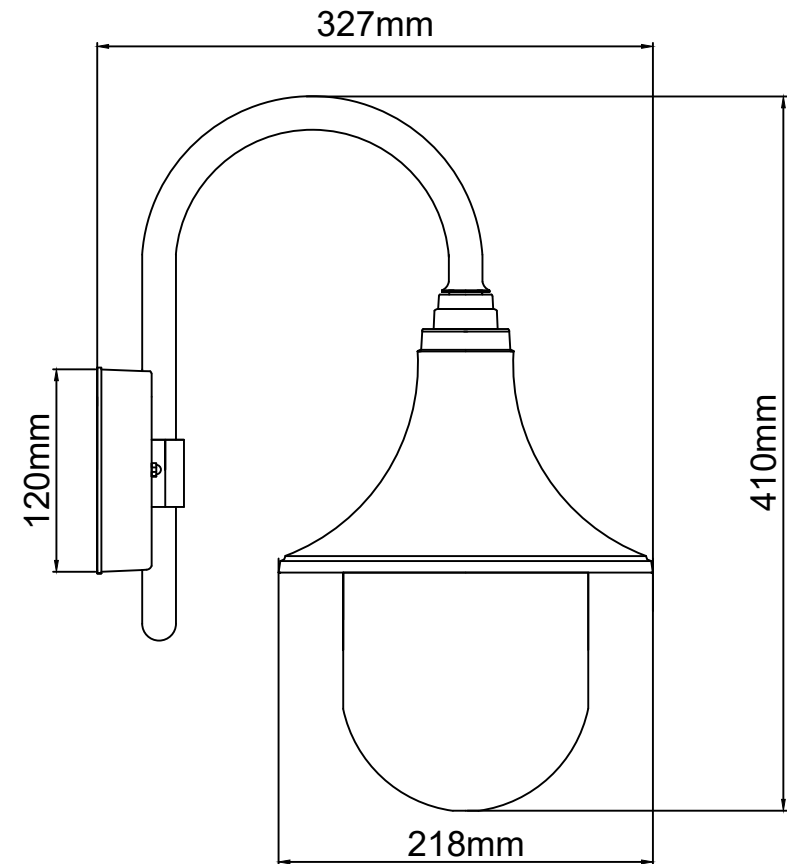

Lamp Details

Lamp Cap: E27
Wattage: 40W (max)



KSR Lighting recommend only branded lamps
For example: Sylvania, GE, Philips or Osram

