



Read these instructions before commencing installation & retain them for future reference.

IP44 Ⓢ Ⓢ Ⓢ **240V 100W Max.**

Important Information

It is recommended that these lanterns are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.

These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before servicing, fitting or replacing lamps. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners) and greasing all nut/bolts every 3 months.

Installation Procedure


Wall Lanterns

- a) Fix plastic plate to wall using supplied rawl plugs and screws provided.
- b) Connect supply leads with terminal block: Brown (L), Blue (N) and Green/Yellow (Earth).
- c) Insert the terminal block on the plastic back plate.
- d) Attach lantern to plastic plate.
- e) Fix Glass panels using clips and screws.
- f) Fit suitable lamp not exceeding wattage specified on the lanterns label.
- g) Switch on supply and test.

Pillar / Mini Post Lantern


- a) Connect supply leads with terminal block: Brown (L), Blue (N) and Green/Yellow (Earth).
- b) Attach lantern to solid base.
- c) Fix Glass panels using clips and screws.
- d) Fit suitable lamp not exceeding wattage specified on the lanterns label.
- e) Switch on supply and test.

Available Finish: Black

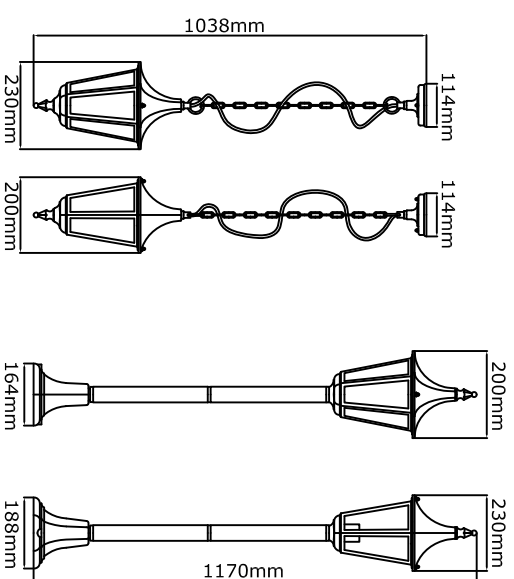


KSR9962


KSR9964



KSR9960



KSR9961



KSR9963



Lamp Details

Lamp Cap: E27
Wattage: 100W (max)



KSR Lighting recommend only branded lamps
For example: Sylvania, GE, Philips or Osram

KSR Lighting After-sales: 023 92 674343
E-mail: info@ksr-lighting.co.uk

