KSR5330-KSR5332



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintainence.

IP65 ⊕ (€ 🖺 240V~50Hz 10W-50W Select & Triple CCT LED

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always safely isolate the mains supply before installing/servicing. Please note this luminaire is Non Dimmable. General maintenance and cleaning should be performed at least quarterly. Clean product outer using a damp cloth, the glass can be cleaned with hot soapy water, dried and buffed to a shine.

Protection from exposure to natural elements in the form of a non-abrasive water repellent protection (car wax). Grease screws and nuts with a suitable waterproof repellent will ensure the product gives you a long lasting trouble free life/finish. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure


Ensure mains supply is turned off. Locate luminaire, use the mounting bracket as a template to drill fixing holes. Secure the bracket into position using suitable fixings. Prepare wiring, using suitable cable for the application. When securing this product to a wall, please remember to allow enough cable to tilt the luminaire to its final resting position. Never allow the mains wiring to become strained. Remove the terminal cover from the back of the fitting.

Terminate the wiring and select the CCT colour you require using the switch. Please Note: Never switch the CCT colour while powered up as this can damage the LED chips. Class I Product so this luminaire must be earthed. Reinstall the terminal cover ensuring the seal is in place and seated correctly. DO NOT use power drivers to tighten terminal cover screws as this can cause damage to the terminal cover and invalidate the warranty! Finally, adjust the angle of tilt to the required position ensuring if tilted upwards for uplighting and tighten bolts. This product can be used as a wall washer if required. Please note that the fitting is only suitable for wall lighting at a 45° Angle, this is to prevent water sitting on the fitting for prolonged

Siena FL Select & 3CCT



Available finish: Black

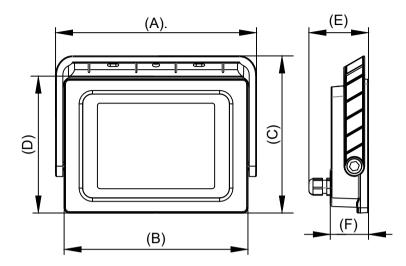

Product Code	Product Dimensions					
	A.	B.	C.	D.	E.	F.
KSR5330	163mm	145mm	136mm	108mm	70mm	45mm
KSR5331	202mm	185mm	163mm	134mm	70mm	45mm
KSR5332	234mm	215mm	183mm	155mm	70mm	45mm

Remove backplate to reveal Wattage & CCT Selectors - set to the desired Wattage & Colour Temperature.



Mains Supply


Green/Yellow - Earth


periods of time. Fig 2. Turn mains supply on and test luminaire

Wiring Details (Class I) - Fitting c/w 1 Metre Cable



This product contains a light source of energy efficiency class F -The LED light source and Control Gear in this product is Non-replaceable.





KSR Lighting Aftersales: 023 92 674343 E-mail: aftersales@ksrlighting.com

Green/Yellow (E)

Luminaire

Brown (L)